




measure analyse optimise



Self-Sufficient Gateway with mobile Data Transmission

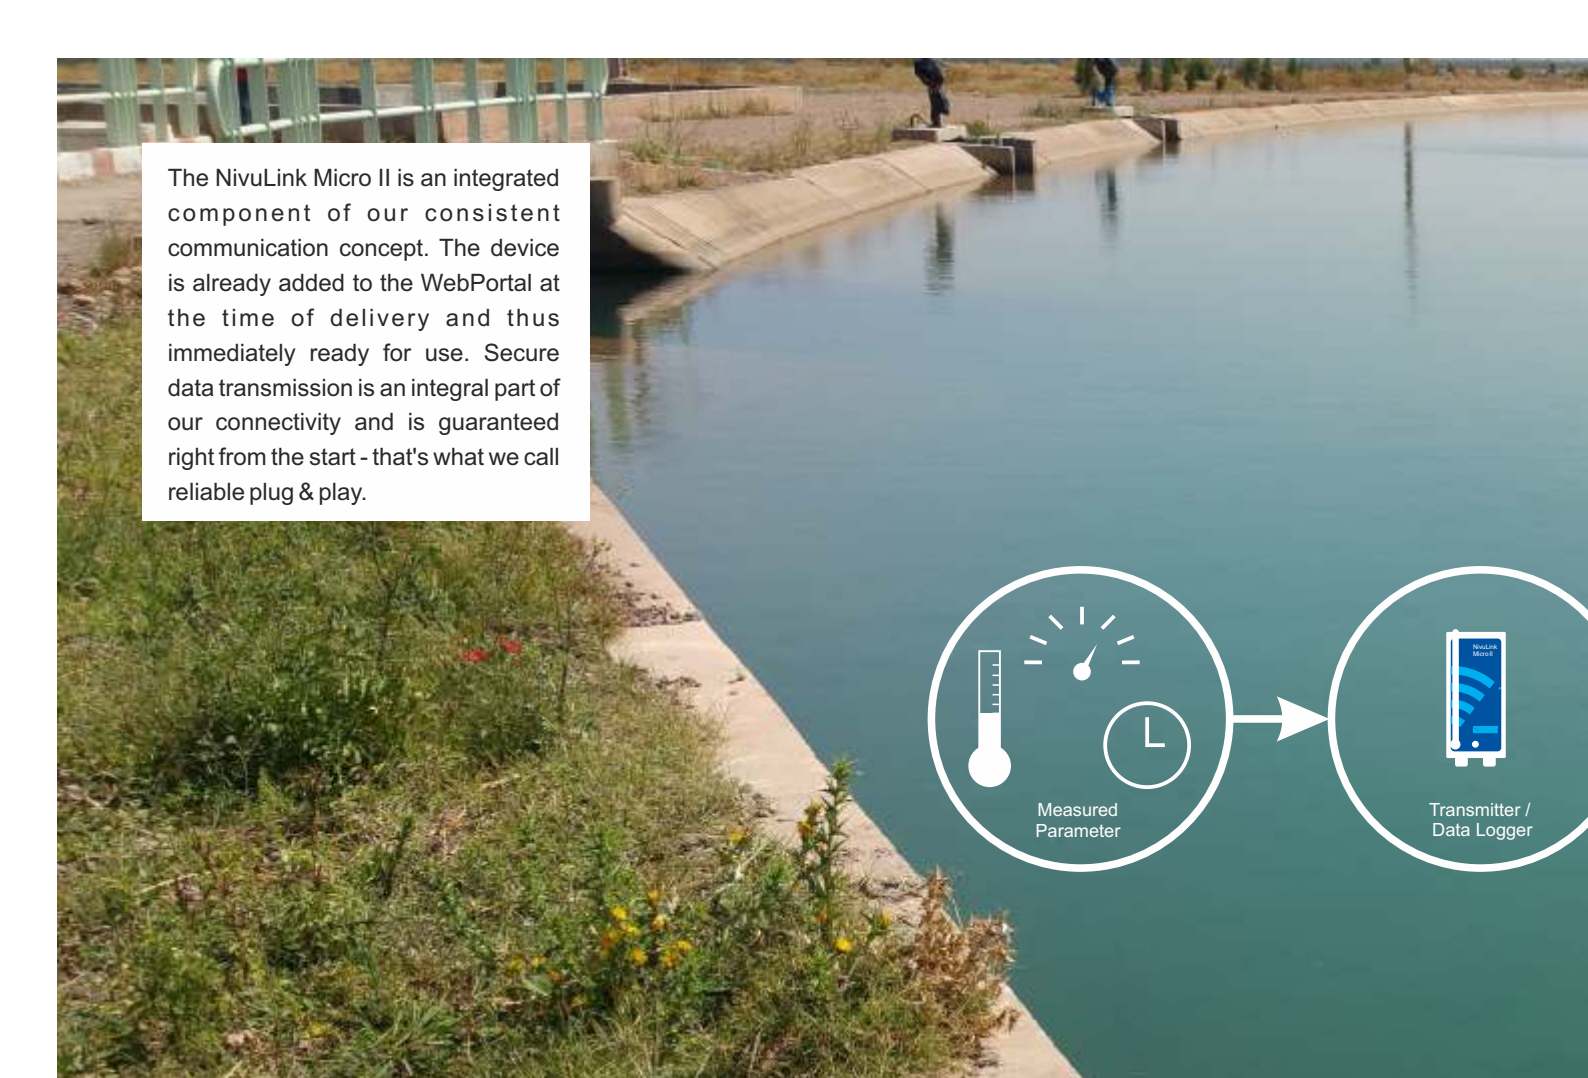

The NivuLink Micro II is an integrated component of our consistent communication concept. The device is already added to the WebPortal at the time of delivery and thus immediately ready for use. Secure data transmission is an integral part of our connectivity and is guaranteed right from the start - that's what we call reliable plug & play.

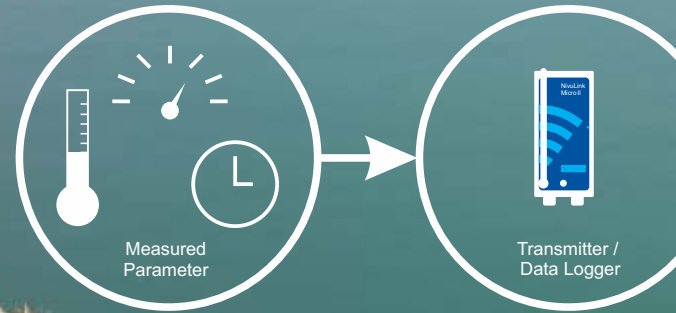

IoT for Measurement Places and Plants without external Power Supply

The NivuLink Micro II is a self-sufficient gateway for the storage and automatic transmission of measurement data via 2G/3G/4G. Use in Ex zone 1 is also possible. The device enables the integration of decentralized measuring points into a control system. Three powerful batteries provide a reliable power supply for the connected sensors and the gateway for up to 7 years*.


The data can be made available and processed either in the customer's own control system or in our powerful NIVUS WebPortal. Up to 4 universal inputs each serve as an analogue or digital interface and, in conjunction with the integrated HART interface, enable the connection of a wide range of sensor types. The counter function enables the connection of impulse

counters. A special event mode provides a higher temporal resolution of the measurement data. The associated upper and lower thresholds can be defined by the customer. Event operation can also be triggered via the digital input. In addition, the gateway has a sophisticated alarm management system.

The NivuLink Micro II comes in a robust IP68 enclosure and is suitable for use in harsh environments.

* Measurement hourly, transmission daily




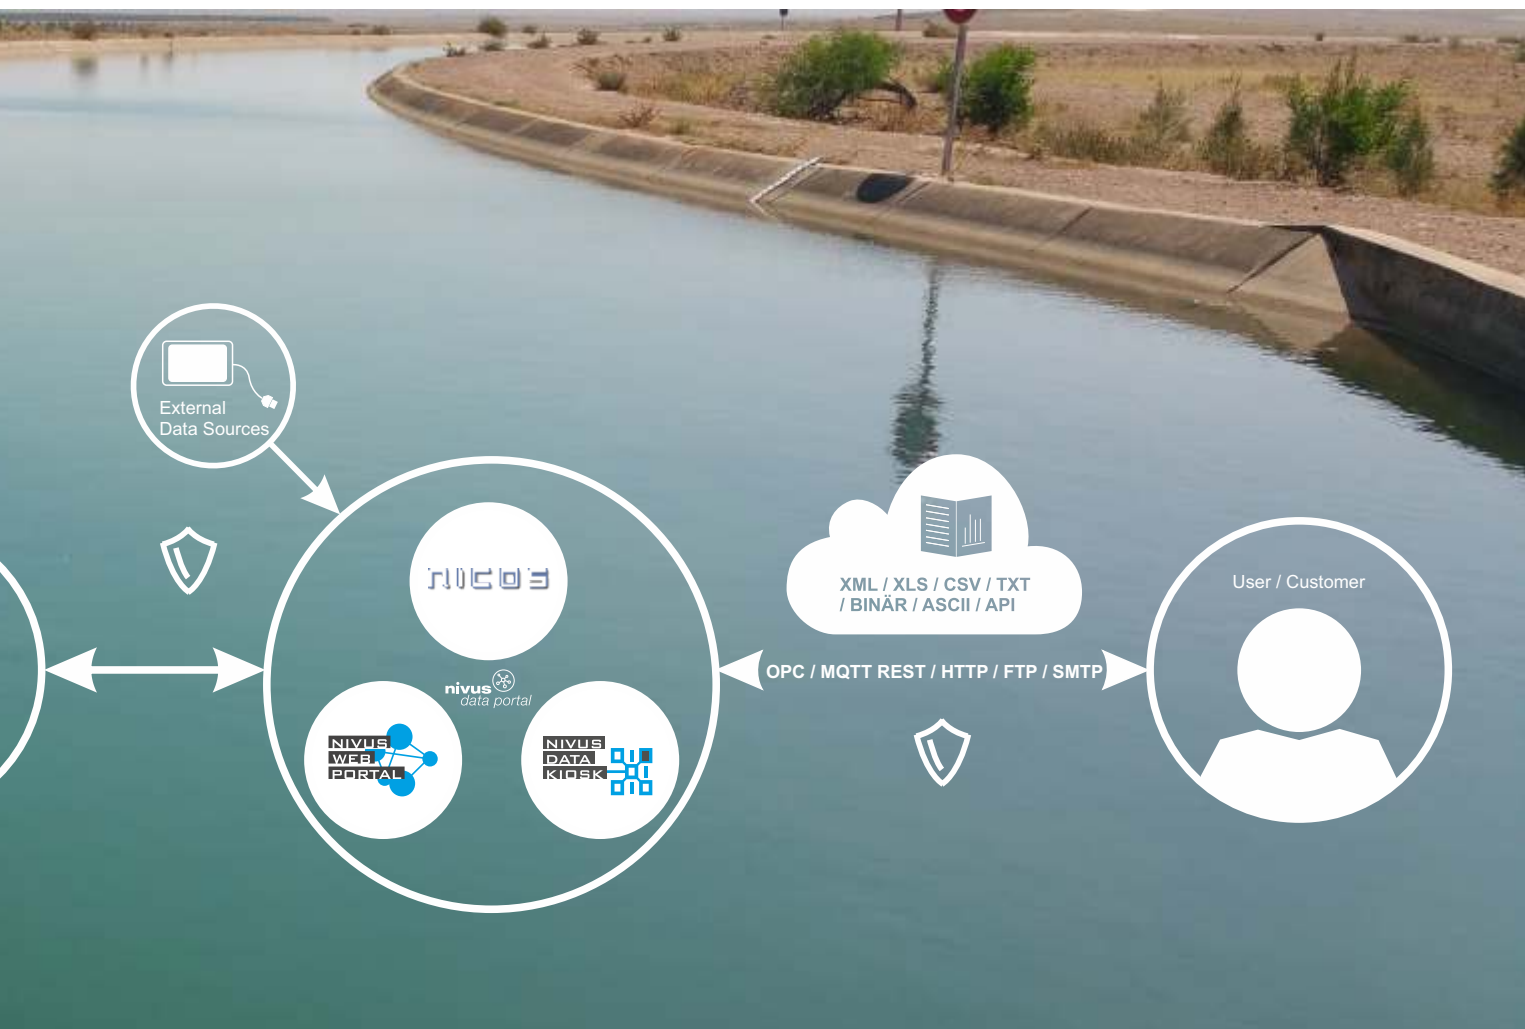


Benefits

- Very long battery life
- Consistent communication concept with VPN communication
- Use in Ex zone 1 possible
- Event operation can be individually configured
- Transmission cycle from 15 min.
- 4 Universal inputs (0-20 mA / 0-10 V or digital)
- Higher operational safety through monitoring of the sensor network

Reliable and quick commissioning

- Parameterisation on site or remote
- Integrated evaluation and display of echo profiles
- Reliable Plug & Play
- No separate software installation

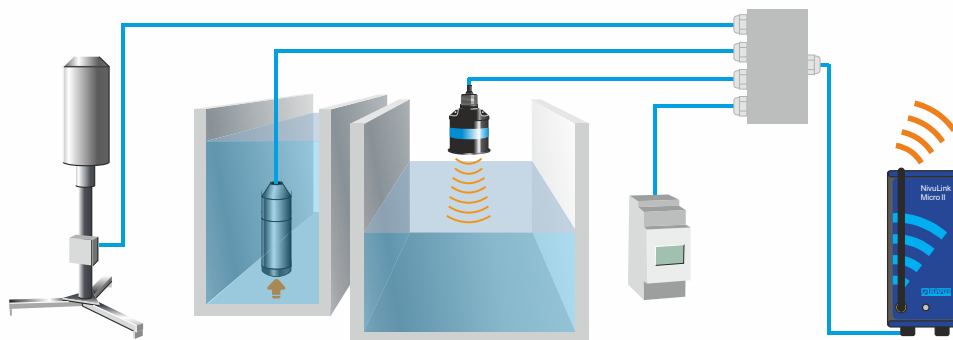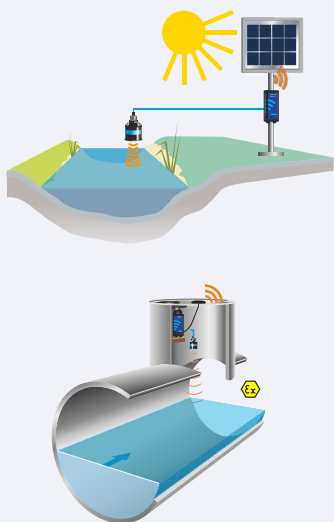

**NIVUS GmbH**

Im Taele 2
 75031 Eppingen, Germany
 Phone +49 7262 9191-0
 Fax +49 7262 9191-999
 info@nivus.com
 www.nivus.com

NIVUS AG

Burgstrasse 28
 8750 Glarus, Switzerland
 Phone +41 55 6452066
 Fax +41 55 6452014
 swiss@nivus.com
 www.nivus.com

NIVUS Austria

Mühlbergstraße 33B
 3382 Loosdorf, Austria
 Phone +43 2754 5676321
 Fax +43 2754 5676320
 austria@nivus.com
 www.nivus.com

NIVUS Sp. z o.o.

ul. Hutnicza 3 / B-18
 81-212 Gdynia, Poland
 Phone. +48 587 602015
 Fax +48 587 602014
 biuro@nivus.pl
 www.nivus.pl

NIVUS France

12 rue Principale
 67870 Bischoffsheim, France
 Phone +33 388 999284
 info@nivus.fr
 www.nivus.fr

NIVUS Ltd.

Head office UK:
 Furzen Hill Farm
 Coventry Road, Cubbington,
 Royal Leamington Spa
 Warwickshire, UK, CV32 7UJ
 Phone +44 1926 632470
 info-uk@nivus.com
 www.nivus.com

NIVUS Middle East (FZE)

Building Q 1-1, ap. 055
 P.O. Box: 9217
 Sharjah Airport International
 Free Zone
 Phone +971 6 5578224
 Fax +971 6 5578225
 middle-east@nivus.com
 www.nivus.com

NIVUS Korea Co. Ltd.

#2301 M-Dong Technopark IT Center,
 32 Songdogwahak-ro Yeonsu-gu
 INCHEON, Korea 21984
 Phone +82 32 2098588
 Fax +82 32 2098590
 jhkwon@nivuskorea.com
 www.nivuskorea.com

NIVUS Vietnam

238/78 Phan Trung Street,
 Tan Tien Ward, Bin Hoa City,
 Dong Nai Province, Vietnam
 Phone +84 94 2623979
 jhkwon@nivuskorea.com
 www.nivus.com

Sophisticated Alarm Management

- Five upper and five lower alarm thresholds per measurement channel
- Freely configurable alarm thresholds and hysteresis
- Alarms sent by SMS or e-mail to freely definable groups of people
- Overview of all alarm messages

Warning Messages

- Exceeding and falling below individually defined thresholds
- Sensor error / error analogue input



Operating Time
 approx. 7 Years



Ex Approval



2G/3G/4G
 Transmission



IP68 Protection

You can find more technical data
 on the NivuLink Micro II here

